




1 From underneath, feed strap through center of buckle.

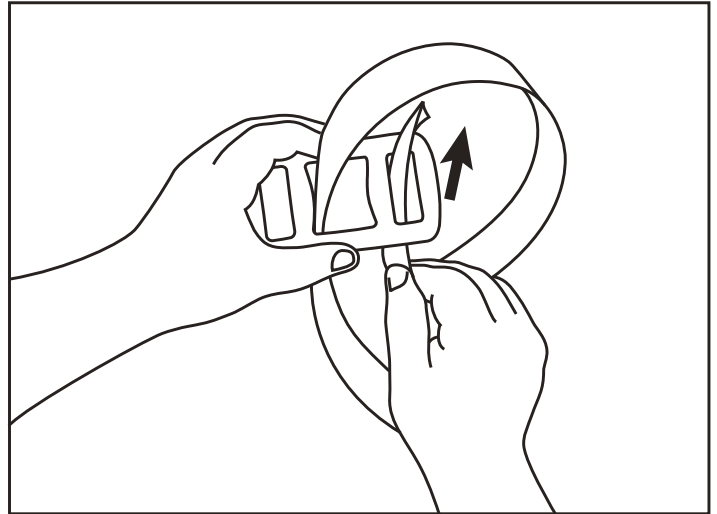

2 Pull strap over front end of buckle and from underneath feed strap up through end of buckle.

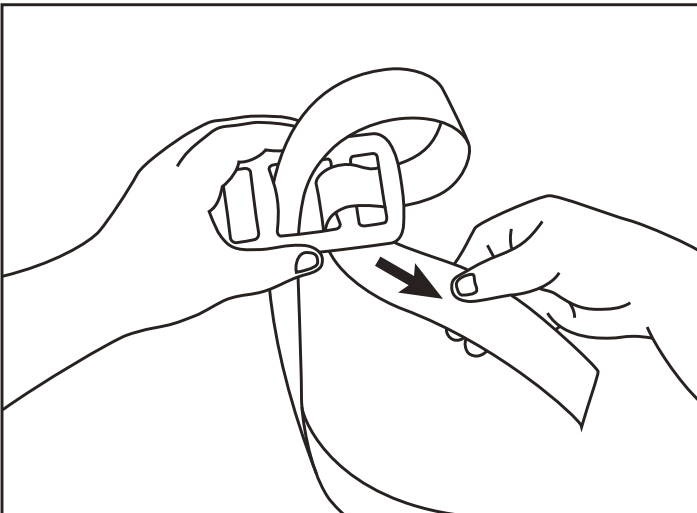

3 Thread strap back down through center of buckle.

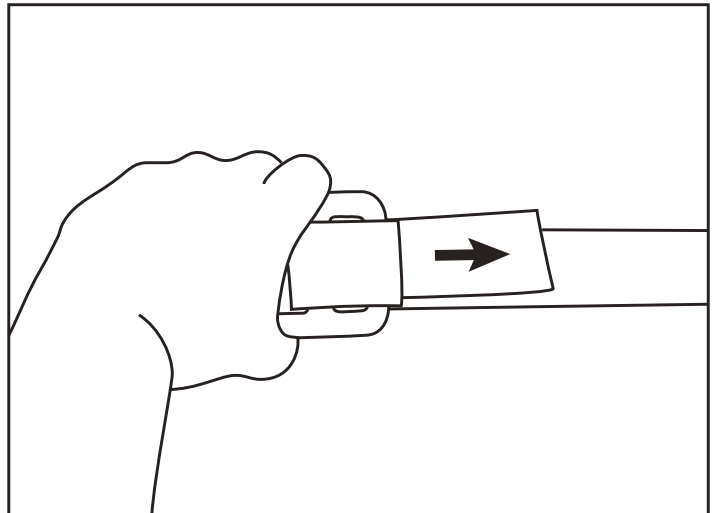

4 Pull tail to tighten and remove any excess slack.

REDBACK®
LOAD RESTRAINT SYSTEMS



T: 425.455.9200 **1.866.455.1345** **F:** 425.455.1750
www.REDBACK.com